

## **Best Fit and Selection of Probability Distribution Models for Frequency Analysis of Extreme Mean Annual Rainfall Events**

EM Masereka<sup>1</sup>, FAO Otieno<sup>2</sup>, GM Ochieng<sup>3</sup> J Snyman<sup>4</sup>

<sup>1</sup>D.Tech. student Civil Engineering Department, Tshwane University of Technology, Pretoria, South Africa

<sup>2</sup>Prof and Vice Chancellor, Durban University of Technology, Durban, South Africa

<sup>3</sup>Prof and Head of Dept; Civil Engineering and Building, Vaal University of Technology, Vanderbijlpark, South Africa

<sup>4</sup>Dr, J. Snyman; Senior Lecturer Dept; Civil Engineering and Building Tshwane University of Technology; Pretoria South Africa

---

**Abstract:-** Frequency analysis of extreme low mean annual rainfall events is important to water resource planners at catchment level because mean annual rainfall is an important parameter in determining mean annual runoff. Mean annual runoff is an important input in determining surface water available for water resource infrastructure development. In order to carry out frequency analysis of extreme low mean annual rainfall events, it is necessary to identify the best fit probability distribution models (PDMs) for the frequency analysis. The primary objective of the study was to develop two model identification criteria. The first criterion was developed to identify candidate probability distribution models from which the best fit probability distribution models were identified. The second criterion was applied to select the best fit probability distribution models from the candidate models. The secondary objectives were: to apply the developed criteria to identify the candidate and best fit probability distribution models and carry out frequency analysis of extreme low mean annual rainfall events in the Sabie river catchment which is one of water deficit catchments in South Africa. Although not directly correlated, mean annual rainfall determines mean annual runoff at catchment level. Therefore frequency analysis of mean annual rainfall events is important part of estimating mean annual runoff events at catchment level. From estimated annual runoff figures water resource available at catchment level can be estimated. This makes mean annual rainfall modeling important for water resource planning and management at catchment level.

The two model identification criteria which were developed are: Candidate Model Identification Criterion (CMIC) and Least Sum of Statistics Model Identification Criterion (LSSMIC).

CMIC and LSSMIC were applied to identify candidate models and best fit models for frequency analysis of distribution of extreme low mean annual rainfall events of the 8 rainfall zones in the Sabie river catchment. The mean annual rainfall data for the period 1920-2004 obtained from the Water Research Commission of South Africa was used in this study. Points below threshold method (PBTM) was applied to obtain the samples of extreme low mean annual rainfall events from each of the 8 rainfall zones. The long term mean of 85 years of each of the 8 rainfall zones was chosen as the threshold.

The identification of the best-fit models for frequency analysis of extreme low mean annual rainfall events in each of the 8 rainfall zones was carried out in 2 stages. Stage 1 was the application of CMIC to identify candidate models. Stage 2 was the application of LSSMIC to identify the best fit models from the candidate models. The performance of CMIC and LSSMIC was assessed by application of Probability-Probability (P-P) plots.

Although P-P plot results cannot be considered completely conclusive, CMIC and LSSMIC criteria make useful tools as model selection method for frequency analysis of extreme mean annual rainfall events.

The results from the application of CMIC and LSSMIC showed that the best fit models for frequency analysis of extreme low mean annual rainfall events in the Sabie river catchment are; Log Pearson 3, Generalised Logistic and Extreme Generalised Value.

**Keywords:-** Best-fit probability distribution function, Candidate probability distribution functions, candidate model identification criterion (CMIC) Least sum of statistics model selection criterion (LSSMIC)

---

### **I. INTRODUCTION**

#### **A. Water resources situation in South Africa**

South Africa is made of 19 water management areas (WMA), 11 of these water management areas are water deficit catchment where water resource demand is greater than the available water resource. Estimates carried out by Department of Water and Forestry indicate that by 2025 two or more additional Water

---

Management Areas will experience water deficit situation (IWMI, 1998). Although only 11 out of 19 water management areas are in situation of water resource deficit, on average the whole country can be classified as water stressed (IWMI, 1998). The annual fresh water availability is estimated to be less than 1700m<sup>3</sup> per capita. The 1700m<sup>3</sup> per capita is taken as the threshold or index for water stress. Prolonged periods of low rainfall periods result into low production agricultural products.

South Africa depends on surface water resources for most of its domestic, industrial and irrigation requirements (NWRS, 2003). There are no big rivers in South Africa, so the surface water resources are mainly in form of runoff. The estimated mean annual runoff under natural condition is 49,000 M m<sup>3</sup>/a and the mean annual rainfall is 465 mm (NWRS, 2003). The utilizable groundwater exploitation potential is estimated at 7500Mm<sup>3</sup>/a (NWRS, 2003). Although not directly correlated the amount of mean annual runoff depends on the amount of mean annual rainfall. Mean annual run off and mean annual rainfall are important variables for water resource planning at catchment level. In planning water resource systems at catchment level, it is necessary to consider the impacts of extreme scenarios of both mean annual rainfall and mean annual runoff.

### ***B. Modeling the distribution of extreme mean annual rainfall events***

Modeling of the distribution of extreme mean annual rainfall events is based on the assumption that these events are independent and identically distributed random events. This process is called stochastic modeling. Stochastic modeling therefore involves developing mathematical models that are applied to extrapolate and generate events based on sample data of those specific events. Numerous Stochastic models have been developed to extrapolate different aspects of hydro-meteorological events including mean annual runoff, mean annual rainfall, temperature, stream flow, groundwater, soil moisture and wind. Shamir, et al (2007) developed stochastic techniques to generate input data for modeling small to medium catchments. Furrer and Katz (2008) studied generation of extreme, stochastic rainfall events. The general practice in stochastic analysis of hydro-meteorological events including extreme mean annual rainfall has been to assume a probability distribution function that is then applied in the analysis. The focus of this study was to develop model identification criteria for selecting the best fit probability distribution functions for frequency analysis of extreme annual rainfall events and apply the developed criteria to identify the best fit models. The identified best fit models were applied in modeling the distribution of extreme mean annual rainfall events in Sabie river catchment which is one of water deficit catchments in South Africa.

### ***C. Methods of identifying best fit probability distribution functions for extreme mean annual rainfall events.***

In developing magnitude – return period models for frequency analysis of extreme mean annual rainfall events like other extreme hydro meteorological events, it is necessary to identify probability distribution functions that best fit the extreme event data. The methods for identifying best fit probability distribution functions that have been applied include: maximum likelihood method (Merz and Bloschl, 2005, Willems et al., 2007), L-moments based method (Hosking et al., 1985, Hosking 1990), Akaike information criteria (Akaike,1973) and Bayesian information criteria.(Schwarz,1978). The reliability of identifying the best fit models for hydro-meteorological frequency analysis has had some criticisms. Schulze (1989), points out that because of general short data, non homogeneity and non stationary of sample data, extrapolation beyond the record length of the sample data may give unreliable results.

Boven (2000) has outlined the below listed limitations of applying probability distribution functions in modeling extreme of hydro-meteorological events e.g. floods:-

- The best fit probability distribution function of the parent events is unknown. And different probability distribution functions may give acceptable fits to the available data. Yet extrapolation based on these probability distribution functions may result in significantly different estimates of the design events.
- The fitted probability distribution function does not explicitly take into account any changes in the runoff generation processes for higher magnitude event

Apart from the above criticisms a gap still remains in that a specific criteria to identify best-fit PDFs for extreme hydro-meteorological events that is universally accepted in South Africa has not been developed ( Smither and Schulze, 2003).

This gap is addressed in this study by developing two model identification criteria based on data from Sabie river catchment. Sabie river catchment is water deficit catchment.

### ***D. Probability Distribution functions for frequency analysis of extreme hydro- meteorological events in South Africa.***

Log-Pearson 3 (LP3) probability distribution function has been recommended for design hydro-meteorological events mostly flood and drought in South Africa (Alexander, 1990, 2001). Gorgens (2007) used both the LP3 and General Extreme Value distribution and found the two models suitable for frequency analysis

of extreme hydro meteorological events in South Africa. However, Mkhandi et al. (2000) found that the Pearson Type 3 probability distribution function fitted with parameter by method of PWM to be the most appropriate distribution to use in 12 of the 15 relatively homogenous regions identified in South Africa (Smithers-J.C, 2002). Cullis et al, (2007) and Gericke (2010) have specifically recommended for further research in developing the methodologies of determining best fit PDFs for frequency analysis of extreme hydro-meteorological events in South Africa (Smithers, J.C, 2002). In this study two model identification criteria were developed to address the problem of identifying best fit probability distribution functions for frequency analysis of extreme hydro meteorological events specifically extreme mean annual rainfall events in water deficit catchments in South Africa.

#### ***E. Uncertainty associated with modeling of extreme mean annual rainfall events.***

There is inherent uncertainty in modeling extreme mean annual rainfall like other extreme hydro-meteorological events. Yen et al. (1986) identified 5 classes of uncertainties. The classes are:-

- Natural uncertainty due to inherent randomness of natural process
- Model uncertainty due to inability of the identified model to present accurately the system's true physical behavior
- Parameter uncertainty resulting from inability to quantify accurately the model inputs and parameters
- Data uncertainty including measurement errors and instrument malfunctioning
- Operational uncertainty that includes human factors that are not accounted for in modeling or design procedure.

Yue-Ping (2010) quotes Van Asselt (2000) to have classified uncertainty based on the modeler's and decision makers' views. In this case, the two classes are model outcome uncertainty and decision uncertainty. The aim of statistical modeling of extreme hydro-meteorological events is to reduce the degree of uncertainty and the risks associated to acceptable levels.

#### ***F. Limitations inherent in presently applied model selection criteria***

The common practice in frequency analysis of extreme hydro meteorological events like extreme mean annual rainfall has been that the modeler chooses a model for frequency analysis or chooses a set of models from which he identifies the best-fit model to be applied for the frequency analysis (Laio *et al.*, 2009). The following limitations have been identified in this approach which include among others the following:

- *Subjectivity*: - This limitation arises from the fact that there is no consistent universally accepted method of choosing a model to be applied or a set of candidate models from which the best fit can be identified for frequency analysis. In other words the choice depends on the experience of the modeler, and therefore subjective;
  - *Ambiguity*: - The limitation arises from the fact that two or more models may pass the goodness-of-fit test. Which one to choose for analysis then leads to ambiguity (Burnham and Anderson, 2002); and
  - *Parsimony*: - The case of parsimony is when the identified model mimics the sample data applied as frequency analysis rather than the trend of the variable under consideration.
- Jiang (2014) has further outlined limitations of presently applied model selection criteria as:
- *Effective sample size*: This arises from the fact that the size of the sample  $n$  may not be equal to data points because of correlation.
  - *The dimension of the model*: This limitation is due to the fact that the number of parameters can affect the model fitting process.
  - *The finite-sample performance and effectiveness of the penalty*: These limitations are due to the fact that the penalty chosen may be subjective: and
  - *The criterion of Optimality*: This limitation is due to the fact that in the present criteria, practical considerations for instance economic or social factors are hardly included.

The limitation of parameter under and over fitting to models has also been cited in the current model selection criteria. An attempt was made to address the above outlined limitations in developing the two model selection criteria.

## **II. METHODS**

Developing two model identification criteria and applying the developed criteria for frequency analysis of extreme low mean annual rainfall events in 8 rainfall zones in Sabie secondary catchment was carried out in 4 stages

1. Developing CMIC for identifying candidate model.

2. Developing LSSMSC for identifying the best fit models from the candidate models.
3. Developing frequency analysis models based on the identified best fit models.
4. Developing  $Q_T$ -T models for each extreme low mean rainfall event sample.

**A. Development process of CMIC**

The development of CMIC was made in two steps. Step 1 was based on classification of PDFs and bound characteristics of upper and lower tail events of the distributions of the sample data of the extreme low mean annual rainfall. The step 2 was based on set significance levels in hypothesis testing as explained below.

**1) Bounds classification and tail events characteristics of PDFs:** The step 1 of development of CMIC criterion was based on the classification of continuous probability distribution functions and bound characteristics of upper and lower tail events of the distributions of sample data. Continuous probability distribution functions can be divided into four classes: Bounded, Unbounded, Non-Negative and Advanced (MathWave, 2011). This division is based on their upper and lower tail events characteristics and their functionality. The lower and the upper tail events of the samples were applied to develop CMIC because the extreme characteristics of a sample are expressed in the spread of tail events. Probability distribution function of events in any sample of any variable has two bounds; upper and lower tail events. MathWave (2011) has proposed three possible characteristics of any tail events bound. These are; - unknown, open and closed. These characteristics were adopted.

The rationale behind the three characteristics can be illustrated as follows: Let sample  $M$  of variable  $X$  be made of events  $X_1, X_2, \dots, X_{n-1}, X_n$  arranged in ascending order and the sample size is  $n$ . If the sample events  $X_1$  and  $X_n$  are defined and known, then the sample comes from a parent population of frequency distribution functions with both lower and upper tails bounded and the tails are closed. These distributions are called bounded with closed tails (MathWave, 2011). If  $X_1$  and  $X_n$  events of  $M$  are undefined with unknown value, then the sample belongs to a parent population of frequency distribution which is unbounded with unknown or open tails. If  $X_1$  and  $X_n$  of the sample are positive, then the sample belongs to a population of frequency distribution with end tails which can be non-negative, unknown, open or closed. The sample data that does not belong to any of the above groups, belongs to populations with advanced distribution functions (MathWave, 2011). Summary of distribution bounds is given in Table I.

**Table I: Bound Classifications and Tail Characteristics of Distribution Functions**

Upper Lower	Unknown	Open	Closed
Unknown	Bounded Unbounded Non-Negative advanced	Unbounded Non-Negative Advanced	Bounded Advanced
Open	Unbounded Advanced	Unbounded Advanced	Advanced
Closed	Bounded Non-Negative Advanced	Non-Negative Advanced	Bounded Advanced

Source: (MathWave, 2011)

The CMIC criterion for identifying sample specific candidate models for frequency analysis was based on Table 1. The development of CMIC involved the following basics:

Let the sample  $M$  of variable  $X$  be made of events:

$$M = \{ X_1, X_2, X_3 \dots \dots \dots X_{n-1}, X_n \} \tag{2.1}$$

If  $X$  events are arranged in ascending order, then

$$X_2 > X_1, X_3 > X_2 \dots \dots \dots X_n > X_{n-1} \tag{2.2}$$

and if  $X_1$  is the smallest numerical value event and forms the last event of lower tail of frequency distribution of  $M$  and  $X_n$  is the largest numerical value event and forms the last event of upper tail of frequency distribution of  $M$ , then in this case, both upper and lower tails of  $M$  are bounded, defined and closed, therefore the candidate models for frequency analysis of  $M$  are bounded and advanced with closed tails. (Table1). There are two extreme scenarios in this method. Scenario one arises when numerical values  $X_1$  and  $X_n$  of a specific sample events are unknown and undefined. In this case all available continuous probability distribution functions are

candidate models. These models are bounded, unbounded, non- negative and advanced (Table I). The other scenario is when the numerical values of  $X_1$  and  $X_n$  are identified and defined numerical values. In this case bounded and advanced continuous probability distribution functions are the candidate models. The step 1 procedure led to identification of the initial candidate models for frequency analysis of low and high extreme mean rainfall sample data events.

2) **Hypothesis testing and significance levels:** This was step 2 of development of CMIC. For initial candidate models identified in Step 1 for each sample data, hypothesis testing at significance levels 0.2, 0.1, 0.05, 0.02 and 0.01 was carried out.

The goodness of fit tests adopted for this study were: Kolmogorov-Smirnov, Anderson-Darling and Chi-Square. The reasons for applying the 3 specific goodness of fit tests are outlined in section C.

The null and the alternative hypothesis for each test were: -

- $H_0$ . The sample data was best described by the specific probability distribution function
- $H_A$ . The sample data was not best described by the specific probability distribution function.

The hypothesis testing was applied to fence-off the final candidate models from the initial candidate models identified by bounds method. Models from initial candidate models that were rejected in hypothesis testing at any significance levels of 0.2, 0.1, 0.05, 0.02 and 0.01 by any of the three goodness-of-fit tests were dropped from the candidate models.

**B. Development of Least Sum of the Statistic Model Identification Criterion (LSSMIC).**

1) **Introduction:** The Least Sum of the Statistic Model Selection Criterion (LSSMSC) was developed by determining the Least Sum of Statistics of goodness of fit of the tests: - Kolmogorov-Smirnov, Anderson-Darling, and Chi-Square. The mathematical principle of each of the tests on which development of LSSMSC was based is briefly discussed below:

2) **Kolmogorov-Smirnov statistic ( $D_n$ ):** Kolmogorov-Smirnov statistic is based on uniform law of large numbers which is expressed in Glivenko-Cantelli Theorem (Wellener, 1977).

The theorem can be summarized as:

$$\|F_n - F\|^\infty \xrightarrow{a.s.} 0 \tag{2.3}$$

In this case  $F$  is the cumulative distribution function,  $F_n$  is the empirical cumulative distribution function defined by:

$$F_n(x) = \frac{1}{n} \sum_{i=1}^n 1[X_i \leq x] \tag{2.4}$$

where  $X_1 \dots \dots X_n$  are i.i.d. with distribution  $F$  and  $\|F - G\|^\infty = \text{Sup}_t |F(t) - G(t)|$

The uniformity of this law for large numbers can be explained as:

$$\|F_n - F\|^\infty = \text{Sup}_x |F_n(x) - F(x)| \tag{2.5}$$

$$= \text{Sup}_x |P_n(X \leq x) - P[X \leq x]| \xrightarrow{a.s.} 0 \tag{2.6}$$

where  $P$  is the empirical distribution that assigns  $\frac{1}{n}$  to each  $X_i$ .

The law of large numbers indicates that for all  $x$ ,  $P_n(X \leq x) \xrightarrow{a.s.} P(X \leq x)$

According to Glivenko–Cantelli theorem (Wellner 1977), this happens uniformly over  $x$ . Applications of Kolmogorov-Smirnov statistic as an index in determining the best-fit model among the candidate models was based on this theorem. The model with the Least Kolmogorov-Smirnov statistic was taken as the best fit model for this test since  $D_n \xrightarrow{a.s.} 0$  as in equation 2.6.

3) **Anderson-Darling statistic ( $A_n^2$ ):** Anderson-Darling statistic is an index of goodness-of-fit test. In this case the Anderson-Darling goodness-of-fit test is the comparison of empirical distribution function ( $F^n(x)$ ) assumed to be the parent distribution that is the distribution being fitted to sample data.

The hypothesis is

$$H_0: F_n(x) = F^0(x) \quad -\infty < x < \infty \tag{2.7}$$

The hypothesis is rejected if;  $F_n(x)$  is very different from  $F^0(x)$ .

The difference between  $F_n(x)$  and  $F^0(x)$  is defined by:-

$$\begin{aligned} \omega_n^2 &= n \int_{-\infty}^{\infty} [F_n(x) - F^0(x)]^2 \psi [F^0(x)] dF^0(x) \\ &= n \int_{-\infty}^{\infty} [F_n(x) - F^0(x)]^2 \psi [F^0(x)] F^0(x) dx \end{aligned} \quad 2.8$$

where  $\psi [F^0(x)] F^0$  is a weight function

For a given variable  $x$  and a distribution  $F^0(i)$  to be fitted to samples of events of  $x$ , the random variable  $nF_n(x)$  has a binomial distribution with probability  $F^0(x)$ . (Anderson,1952). The expected value of  $nF_n(x)$  is  $nF^0(x)$  and the variance is  $nF^0(x) [1 - F^0(x)]$ .

Since the objective was to identify best fit models for frequency analysis of extreme events, the emphasis was put into upper and lower tails of the models in this case

$$\psi(v) = \frac{1}{v(1-v)}, \quad 2.9 (a)$$

then specifically for extreme mean rainfall events  $x$

$$\psi(v) = \sqrt{n} \frac{F_n(x) - F^0(x)}{\sqrt{n}[1 - F^0(x)]} \quad 2.9 (b)$$

In equation 2.8 if the mean is 0 and the variance 1, then  $F_n(x) = F^0(x)$  and this leads to the Anderson-Darling statistic:-

$$A_n^2 = n \int_{-\infty}^{\infty} \frac{[F_n(x) - F^0(x)]^2}{F^0(x)[1 - F^0(x)]} dF^0(x) \quad 2.10$$

Equation 2.10 can be re-arranged and be written as

$$A_n^2 = -n - \frac{1}{n} \sum_{j=1}^n (2j - 1) [\log v_j + \log (1 - v_{(n-j+1)})] \quad 2.11$$

where  $v_j = F^0(x_j)$  and

$x_1 < x_2 \dots \dots < x_n$  is the ordered sample

From equation 2.10 and 2.11, it can be concluded that the model with the least value of  $A^2$  among the candidate models is the best fit.

4) *Chi-Squared statistic  $\chi^2_{red}$* : Applying  $\chi^2_{red}$  as an index in determining the best-fit-model of extreme low mean annual rainfall events from candidate models was based on the interpretation of  $\chi^2_{red}$  as described in the section that follows.

The value of  $\chi^2_{red} = 1$  indicates that the discrepancy between the empirical distribution function ( $F_n x$ ) and the model ( $F^0(x)$ ) being fitted to sample data is in accord with the error of variance. Therefore the best fit model among the candidate models is the one with the least discrepancy. Absolute  $\chi^2_{red}$  ( $abs\chi^2_{red}$ ) was adopted in the study

$abs\chi^2_{red}$  was defined as:

$$abs.\chi^2_{red} = \left| 1 - \frac{\bar{X}^2}{v} \right| \quad |i = 1..m \quad 2.12(a)$$

$$= \left| 1 - \frac{1}{v} \sum \frac{(O-E)^2}{\sigma^2} \right| \quad |i = 1..m \quad 2.12(b)$$

where  $v$  =number of degrees of freedom given by  $N - n - 1$

$E_i$  is the expected frequency in the corresponding bin

$O_i$  is the observed frequency in each bin,  $N$  = Number of observations

$n$  = Number of fitted observations,  $m$  = Number of candidate models

### C. Elements of LSSMSC

To develop an alternative but simple model selection criterion, advantages of  $Dn$ ,  $A^2_n$  and  $\chi^2$  were intergrated. The intergration of the three goodness of fit tests led to Least Sum of Statistic Model Selection Criterion (LSSMSC). The definition of the developed LSSMSC is:

$$LSSMSC = Dn + A_n^2 + abs.(1 - \chi^2)_{red} |Least i (i = 1..m)$$

2.13

where  $Dn$  = Kolomogrov-Smirnov statistic

$A_n^2$  = Anderson-Darling statistic

$abs.(1 - \chi^2)_{red}$  = Absolute reduced Chi-Square

$m$  = number of models

#### D. Application of CMIC and LSSMIC

The developed CMIC and LSSMSC criteria were applied in Easy fit v5.5 software to identify candidate and best fit models for the frequency analysis of the extreme mean annual events. Mean annual rainfall data for the period 1920-2004 for each of the 8 rainfall zones was obtained from Water Research Commission Pretoria. Easy fit V5.5 was chosen for this study because of the following features (mathwave,2011):

- 1) It supports more than 50 continuous and discrete probability distribution functions.
- 2) It has powerful automated fitting model combined with flexible manual fitting capabilities.
- 3) It carries out goodness of fit tests
- 4) It has capability of generating random numbers
- 5) It is easily applied to user interface
- 6) There is comprehensive technical assistance from the developers (Mathwave,2011)

Other scientific features which make Easy Fit V.5.5 include

- It can be applied to analyze large data sets (up to 250,000 data points)
- It includes application of advanced distributions to improve the validity of probability distribution functions
- It can be applied to calculate descriptive statistics
- It organizes data and analyzes results into project files.

**1) Application of points below threshold (PBT) Model:** Points below threshold (PBT) model was applied to identify extreme low mean annual rainfall events for each of the 8 rainfall zones. For each of the 8 rainfall zones, the mean of mean annual rainfall values for the period 1920-2004 was chosen as the threshold for that particular rainfall zone. The mean rainfall events less than the threshold formed the extreme low mean annual rainfall events. The mean of mean annual rainfall values of each rainfall zone was chosen as the threshold because annual rainfall less than the mean leads to agricultural drought.

#### E. Development of $Q_T$ -T models

Based on the identified best fit model for frequency analysis extreme low mean annual rainfall events for each of the 8 rainfall zones,  $Q_T$ -T models were developed. The developed  $Q_T$ -T models were applied to extrapolate and estimate extreme low mean annual rainfall events for return periods of 5, 10, 25, 50, 100 and 200 years for each of the 8 rainfall zones. The methods of parameter estimations applied were: methods of moments, and maximum likelihood.

#### F. Assessment of performance of CMIC and LSSMIC

The performance of CMIC and LSSMIC as candidate and best fit models for frequency analysis of extreme mean annual rainfall events was carried out by applying probability-probability (P-P) in EasyFit 5.5 software. EasyFit 5,5 software displays reference graphic plots. The closeness of the candidate model plot to the reference graphic plots was the mode of the assessment applied. This was visual assessment.

### III. RESULTS

#### A. Descriptive statistics of extreme low mean annual rainfall for 8 rainfall zones.

The descriptive statistics of events of the 8 samples of extreme low mean annual rainfall are presented in table II. The descriptive statistics were applied in developing  $Q_T$ -T models for frequency analysis of the extreme low annual rainfall events in each rainfall zone. The skewness and excess kurtosis of each sample have been applied in describing the symmetry and the peakedness of the frequency distributions of these samples.

**Table II:** Descriptive statistics

Rainfall zones	X3a1	X3a2	X3b	X3c	X3d1	X3d2	X3e	X3f
Statistic	Value	Value	Value	Value	Value	Value	Value	Value
<b>Sample Size</b>	50	47	49	51	51	47	52	50
<b>Range</b>	38.88	41.03	50.2	52.63	59.39	55.28	49.26	50.01
<b>Mean</b>	85.49	83.36	82.96	82.65	82.89	80.9	80.9	82.06
<b>Variance</b>	96.92	107.6	126.1	173.3	156.2	149.3	165.5	162.4
<b>Std. Deviation</b>	9.845	10.37	11.23	13.16	12.5	12.22	12.86	12.74
<b>Coef. of Variation</b>	0.1152	0.1245	0.1354	0.1593	0.1508	0.151	0.159	0.1553
<b>Std. Error</b>	1.392	1.513	1.604	1.843	1.75	1.782	1.784	1.802
<b>Skewness</b>	-0.549	-0.460	-0.923	-1.043	-1.14	-0.865	-0.764	-0.694
<b>Excess Kurtosis</b>	-0.454	-0.428	0.569	0.784	1.944	0.738	-0.230	-0.200

The skewness value of each of the 8 samples of extreme mean annual rainfall is less than zero ie negative. This means that the frequency distribution of events in each of these samples is left skewed. Most of the events are concentrated on the right of the mean with extreme events to the left. The excess kurtosis value of each of the 8 samples is less than 3. This means that the frequency distribution of each sample is platykurtic with peak flatter and wider than that of normal distribution.

**B. Initial candidate models**

The results of applying CMIC to each of the 8 data samples of extreme low mean annual rainfall are presented in table II. To obtain these results, method described in section B was applied. The results showed that all the 8 samples had similar candidate models presented in table II. These candidate models are: Beta, Generalised Extreme Value, Generalised Logistic, Generalised Pareto, Johnson SB, Kamaraswamy, Log-Pearson 3, Piet, Phased Bi- Weibull, Power function, Reciprocal, Triangular, Uniform and Wakeby.

**C. Final candidate models**

Step 2 of the CMIC described in section B was applied to sets of the initial identified candidate models given in table II. The results are presented in tables 3.3-3.5. The results showed that the final candidate models for frequency analysis of extreme low mean annual rainfall events in each of the 8 rainfall zones were: Generalised Logistic (GL), Log-Pearson 3 (LP3), and Generalised Extreme Value (GEV). The CDFs and PDFs of the identified candidate models are presented in table VII.

Generalised Logistic, Log-Pearson 3 and Generalised Extreme Value frequency analysis models were identified as the final candidate models because none of these models was rejected at significance levels; 0.2,0.1, 0.02 and 0.01 in the three goodness of fit test in any of the 8 samples of extreme low mean rainfall events. The results of goodness of fit tests are presented in tables IV-VI

**Table III: The identified initial candidate models**

Distribution	Kolmogorov Smirnov ( $D_n$ )		Anderson Darling ( $A^2_n$ )		Chi-Squared ( $\chi^2$ )	
	Statistic	Rank	Statistic	Rank	Statistic	Rank
<b>Beta</b>	0.0731	3	2.155	7	2.56	5
<b>Gen. Extreme Value</b>	0.0795	5	0.2345	3	2.898	7
<b>Gen. Logistic</b>	0.102	10	0.5311	5	2.863	6
<b>Gen. Pareto</b>	0.0894	7	11.49	12	N/A	
<b>Johnson SB</b>	0.0704	1	0.168	1	4.18	9
<b>Kumaraswamy</b>	0.0718	2	2.153	6	2.56	4
<b>Log-Pearson 3</b>	0.0931	8	0.3815	4	1.27	1
<b>Pert</b>	0.1366	12	4.782	10	6.4	10
<b>Phased Bi-Exponential</b>	0.9992	15	512.6	15	N/A	
<b>Phased Bi-Weibull</b>	0.4529	14	52.26	14	N/A	
<b>Power Function</b>	0.0871	6	2.216	8	1.78	2
<b>Reciprocal</b>	0.2855	13	9.87	11	16.18	11
<b>Triangular</b>	0.1047	11	2.431	9	2.32	3
<b>Uniform</b>	0.0954	9	15.01	13	N/A	
<b>Wakeby</b>	0.0748	4	0.2058	2	3.774	8

Tables IV-VI Identified final candidate models  
Table IV: Generalised Extreme Value distribution

Gen. Extreme Value					
Kolmogorov-Smirnov ( $D_n$ )					
Sample Size	47				
Statistic	0.0815				
P-Value	0.8886				
Rank	1				
$\alpha$	0.2	0.1	0.05	0.02	0.01
Critical Value	0.153	0.1748	0.1942	0.2172	0.233
Reject?	No	No	No	No	No
Anderson-Darling ( $A_n^2$ )					
Sample Size	47				
Statistic	0.34				
Rank	1				
$\alpha$	0.2	0.1	0.05	0.02	0.01
Critical Value	1.375	1.929	2.502	3.289	3.907
Reject?	No	No	No	No	No
Chi-Squared ( $\chi^2$ )					
Deg. of freedom	4				
Statistic	4.17				
P-Value	0.3836				
Rank	2				
$\alpha$	0.2	0.1	0.05	0.02	0.01
Critical Value	5.989	7.779	9.488	11.67	13.28
Reject?	No	No	No	No	No

Table V: Generalised Logistics distribution

Gen. Logistic					
Kolmogorov-Smirnov ( $D_n$ )					
Sample Size	47				
Statistic	0.1055				
P-Value	0.6343				
Rank	3				
$\alpha$	0.2	0.1	0.05	0.02	0.01
Critical Value	0.153	0.1748	0.1942	0.2172	0.233
Reject?	No	No	No	No	No
Anderson-Darling ( $A_n^2$ )					
Sample Size	47				
Statistic	0.5878				
Rank	3				
$\alpha$	0.2	0.1	0.05	0.02	0.01
Critical Value	1.375	1.929	2.502	3.289	3.907
Reject?	No	No	No	No	No
Chi-Squared ( $\chi^2$ )					
Deg. of freedom	4				
Statistic	3.292				
P-Value	0.5102				
Rank	1				
$\alpha$	0.2	0.1	0.05	0.02	0.01
Critical Value	5.989	7.779	9.488	11.67	13.28
Reject?	No	No	No	No	No

Table VI: Log-Pearson distribution

Log-Pearson 3					
<b>Kolmogorov-Smirnov ( <math>D_n</math> )</b>					
Sample Size	47				
Statistic	0.0899				
P-Value	0.8093				
Rank	2				
□	0.2	0.1	0.05	0.02	0.01
<b>Critical Value</b>	0.153	0.1748	0.1942	0.2172	0.233
<b>Reject?</b>	No	No	No	No	No
<b>Anderson-Darling ( <math>A_n^2</math> )</b>					
Sample Size	47				
Statistic	0.3954				
Rank	2				
□	0.2	0.1	0.05	0.02	0.01
<b>Critical Value</b>	1.375	1.929	2.502	3.289	3.907
<b>Reject?</b>	No	No	No	No	No
<b>Chi-Squared ( <math>\chi^2</math> )</b>					
Deg. of freedom	5				
Statistic	4.33				
P-Value	0.5029				
Rank	3				
□	0.2	0.1	0.05	0.02	0.01
<b>Critical Value</b>	7.289	9.236	11.07	13.39	15.09
<b>Reject?</b>	No	No	No	No	No

Table VII: Candidate models for modeling the distribution of extreme low mean annual rainfall events in 8 rainfall zones in Sabie river catchment

Distribution	CDF or PDF	Domain
Generalized Extreme Value	$F(x) = \begin{cases} \exp \left( - \left( 1 + kz \right)^{-1/k} \right) & k \neq 0 \\ \exp \left( - \exp(-z) \right) & k = 0 \end{cases}$	$\left. \begin{aligned} 1 + k \frac{(x - \mu)}{\sigma} > 0 & \text{ for } k \neq 0 \\ -\infty < x < +\infty & \text{ for } k = 0 \end{aligned} \right\}$
Generalized Logistics	$F(x) = \begin{cases} \frac{1}{1 + (1 + kz)^{-1/k}} & k \neq 0 \\ \frac{1}{1 + \exp(-z)} & k = 0 \end{cases}$	$\left. \begin{aligned} 1 + k \frac{(x - \mu)}{\sigma} > 0 & \text{ for } k \neq 0 \\ -\infty < x < +\infty & \text{ for } k = 0 \end{aligned} \right\}$
Log-Pearson 3	$F(x) = \frac{\Gamma(\ln(x) - \gamma) / \beta^{(\alpha)}}{\Gamma(\alpha)}$	$\left. \begin{aligned} 0 < x \leq e^\gamma & \beta < 0 \\ e^\gamma \leq x < +\infty & \beta > 0 \end{aligned} \right\}$

D. Results of identification of best-fit models for frequency analysis of extreme low mean annual rainfall events in Sabie river catchment

The best fit models for frequency analysis of extreme low mean annual rainfall events in 8 rainfall zones in Sabie river catchment are presented in tables VII-XV. The summary of the results of the best fit model identification is presented in table XVI.

Table VIII: Best fit model : Zone X3 a1

Distribution	Kolmogorov Smirnov $D_n$	Anderson Darling $A_n^2$	Chi-Squared ( $\chi^2$ )	Abs(1- $\chi^2$ )	LSSMIC	Best fit
	Statistic	Statistic	Statistic			
Gen. Extreme Value	0.079	0.234	2.898	1.898	2.211	
Gen. Logistic	0.102	0.531	2.863	1.863	2.496	
Log-Pearson 3	0.093	0.381	1.270	0.270	0.744	X

Table IX: Best fit model : Zone X3a2

Distribution	Kolmogorov Smirnov $D_n$		Anderson Darling $A_n^2$	Chi-Squared ( $\chi^2$ )		Abs (1- $\chi^2$ )	LSSMIC	Best fit
	Statistic		Statistic	Statistic				
Gen. Logistic	0.105		0.587	3.292		2.292	2.984	x
Gen. Extreme Value	0.081		0.340	4.170		3.170	3.591	
Log-Pearson 3	0.089		0.395	4.330		3.330	3.814	

Table X: Best fit model : Zone X3b

Distribution	Kolmogorov Smirnov $D_n$		Anderson Darling $A_n^2$	Chi-Squared ( $\chi^2$ )		Abs (1- $\chi^2$ )	LSSMIC	Best fit
	Statistic		Statistic	Statistic				
Gen. Logistic	0.073		0.302	2.653		1.653	2.028	x
Johnson SB	0.089		0.241	5.127		4.127	4.457	
Log-Pearson 3	0.077		0.273	7.055		6.055	6.405	

Table XI: Best fit model : Zone X31c

Distribution	Kolmogorov Smirnov ( $D_n$ )		Anderson Darling ( $A_n^2$ )	Chi-Squared ( $\chi^2$ )	Abs. (1- $\chi^2$ )	LSSMIC	Best fit
	Statistic		Statistic	Statistic			
Gen. Extreme Value	0.042		0.133	0.350	0.649	0.824	
Log-Pearson 3	0.059		0.248	0.866	0.133	0.440	x
Gen. Logistic	0.069		0.286	2.065	1.065	1.420	

Table XII: Best fit model : Zone X3d1

Distribution	Kolmogorov Smirnov ( $D_n$ )		Anderson Darling ( $A_n^2$ )	Chi-Squared ( $\chi^2$ )	Abs. (1- $\chi^2$ )	LSSMIC	Best fit
	Statistic		Statistic	Statistic			
Wakeby	0.088		1.362	3.262	2262	3.712	
Gen. Logistic	0.106		0.516	3.950	2.950	3.572	x
Gen. Extreme Value	0.097		0.446	5.923	4.923	5.466	

Table XII: Best fit model : Zone X3d2

Distribution	Kolmogorov Smirnov ( $D_n$ )		Anderson Darling ( $A_n^2$ )	Chi-Squared ( $\chi^2$ )	Abs. (1- $\chi^2$ )	LSSMIC	Best fit
	Statistic		Statistic	Statistic			
Gen. Extreme Value	0.054		0.118	0.799	0.201	0.373	x
Gen. Logistic	0.082		0.191	1.334	0.334	0.607	
Log-Pearson 3	0.055		0.124	1.553	0.553	0.732	

Table XIV: Best fit model : Zone X3e

Distribution	Kolmogorov Smirnov ( $D_n$ )		Anderson Darling ( $A_n^2$ )	Chi-Squared ( $\chi^2$ )	Abs.(1- $\chi^2$ )	LSSMIC	Best fit
	Statistic		Statistic	Statistic			
Gen. Extreme Value	0.088		0.461	2.029	1.029	1.578	X
Gen. Logistic	0.107		0.771	3.415	2.415	3.293	
Log-Pearson 3	0.125		0.770	3.432	2.432	3.327	

Table XV: Best fit model : Zone X3f

Distribution	Kolmogorov Smirnov ( $D_n$ )	Anderson Darling ( $A_n^2$ )	Chi-Squared ( $\chi^2$ )	Abs. (1- $\chi^2$ )	LSSMIC	Best fit
	Statistic	Statistic	Statistic			
Log-Pearson 3	0.072	0.401	1.244	0.244	0.717	X
Gen. Extreme Value	0.057	0.265	1.843	0.843	1.165	
Gen. Logistic	0.092	0.560	4.527	3.527	4.179	

Table XVI: Summary of best fit model identification results.

Best fit model	Rainfall zones	
		%
Log-Pearson 3	3	37.5
Generalized Logistic	3	37.5
Generalized Extreme Value	2	25
Totals	8	100

Log- Pearson 3 and Generalised Logistic models each was the best fit models for frequency analysis of extreme low mean annual rainfall events in 3 rainfall zones. Generalised extreme value model was the best fit in 2 rainfall zones. The results shows that there no single model which is the best fit for frequency analysis of all low mean annual rainfall events in Sabie river catchment.

Table XVII: Best fit and  $Q_T$ -T models for frequency analysis of extreme low mean annual rainfall events

Rainfall zone	Best fit model	$Q_T$ -T model
X3a1	LP 3	$X_T = 85.49 - 9.845K_T$
X3a2	GL	$X_T = 100.23 - 8.797 \{1 - (T - 1)^{-0.0964}\}$
X3b	GL	$X_T = 100.7 - 29.65 \{1 - (T - 1)^{-0.1967}\}$
X3c	LP 3	$X_T = 82.65 - 13.16 K_T$
X3d1	GL	$X_T = 100.63 - 39.52\{1 - (T - 1)^{-0.1638}\}$
X3d2	GEV	$X_T = 100.86 - 22.67 \{1 - \left[-\ln\left(1 - \frac{1}{T}\right)\right]^{0.5921}\}$
X3e	GEV	$X_T = 99.84 - 21.43\{1 - \left[-\ln\left(1 - \frac{1}{T}\right)\right]^{0.669}\}$
X3f	LP 3	$X_T = 82.06 - 12.74k_T$

**E. Results of frequency analysis of extreme low mean annual rainfall events in 8 rainfall zones in water deficit catchments in South Africa**

The results of frequency analysis of extreme low mean annual rainfall events in the 8 zones of water deficit catchments in South Africa are presented in table XVIII.

**Table XVIII:** Recurrence intervals in years of extreme low mean annual rainfall events

Rainfall zone	Best-fit	Mathematical model	Recurrence interval in years					
			5	10	25	50	100	200
			X3a1	LP3	$X_T = 85.49 - 9.845K_T$	77.06	73.18	69.84
X3a2	GL	$X_T = 100.23 - 8.797 \{1 - (T - 1)^{-0.0964}\}$	99.12	98.55	97.90	97.49	97.08	96.71
X3b	GL	$X_T = 100.7 - 29.65 \{1 - (T - 1)^{-0.1967}\}$	93.62	90.30	86.91	84.84	83.06	81.52
X3c	LP3	$X_T = 82.65 - 13.16 K_T$	71.67	68.23	66.78	64.15	62.90	61.54
X3d1	GL	$X_T = 100.63 - 39.52 \{1 - (T - 1)^{-0.1638}\}$	92.60	88.91	84.59	82.00	79.73	77.72
X3d2	GEV	$X_T = 100.86 - 22.67 \left\{1 - \left[-\ln\left(1 - \frac{1}{T}\right)\right]^{0.5921}\right\}$	87.51	84.17	81.60	80.44	79.68	78.99
X3e	GEV	$X_T = 99.84 - 21.43 \left\{1 - \left[-\ln\left(1 - \frac{1}{T}\right)\right]^{0.6669}\right\}$	86.27	83.17	80.93	79.99	79.40	79.03
X3f	LP3	$X_T = 82.06 - 12.74k_T$	71.20	68.01	63.07	60.45	59.12	57.82

**F. How CMIC and LSSMIC address common limitations of model identification criteria**

General Information Criteria (GIC) can be expressed as:

$$GIC(M) = \bar{Q}_m + \lambda_n |M| \tag{3.1}$$

where  $\bar{Q}_m$  is the measure lack of fit by model  $M$

$|M|$  is the dimension of  $M$ , defined as the number of free parameter under model  $M$

$\lambda_n$  is the penalty for complexity of the model (Parsimony)

$\lambda_n$  may depend on effective sample size  $n$  and dimension of  $M$  (free parameters)

Addressing of limitations cited by Jiang (2014) by developing CMIC and LSSMIC was based on Equation 3.1. Emanating from this work and based on the results obtained thereof, following can be considered with respect to the previous cited limitations with the current model selection criteria:

- **Limitation of effective sample size**

In the case where the sample size  $n$  is not equal to sample points, this limitation is addressed by identifying candidate models and best models based on characteristic of sample probability tail events and hypothesis significance levels. Sample distribution tail shape and not size is applied. In so doing, the effect of sample size is eliminated. Kolomogrov-Smirnov goodness-of-fit index is a component of LSSMIC. This index is generally not influenced by the possible inequality of sample size against the sample points especially in case of correlations.

- **Limitation due to dimension of the model (parameters)  $|M|$**

For practical purposes as illustrated in previous sections, the Anderson-Darling goodness-of-fit index has been adjusted to address the complexity of the problem (Refer to Equation 2.11). Chi-Squared goodness-of-fit was also adjusted to absolute index to address the limitation of dimension of the model (Refer to Equation 2.12(a)). Over and under parameter fitting limitation was also addressed in developing of absolute Chi-Squared index (Refer to Equation 2.12(b)). In this procedure parsimony was also addressed. Both Anderson-Darling and Chi-Squared indices are elements in LSSMIC.

- **Limitation of ambiguity**

Determination of LSSMIC index results into specific numbers which in turn reduces ambiguity. A special case is when parameters shape or scale of Wakeby model is equal to zero. In that case Wakeby and Generalized Pareto statistics are equal and if are the least, then the two models are taken as the best fit.

- **Limitation of Criterion of Optimality**

CMIC and LSSMIC have been developed in such a way that other parameters can be included. This approach ensures that technical and social parameters or variables can be included when needed. In this particular case peaks under threshold models have been included. This could practically be assigned to the demand for water resources needed at catchment level.

- **Limitation of small sample and extreme events**

This limitation is deemed to be solved by including Anderson-Darling and Kolmogorov-Smirnov in LSSMIC as both cater for small sample and extreme events scenarios.

#### **IV. CONCLUSION**

The main objective of this study was to develop two model identification criteria for frequency analysis of extreme low mean rainfall events in water deficit catchments in South Africa. The two model selection criteria which were developed are:

1. Candidate Model Identification Criterion (CMIC) for identifying candidate models.
2. Least Sum of Statistics Model Identification Criterion (LSSMIC) for identifying the best fit models for frequency analysis of the extreme low mean annual rainfall events from the identified candidate models.

The two developed criteria were applied to identify candidate models and best fit models for frequency analyses of the extreme low mean annual rainfall events in 8 rainfall zones in Sabie river catchment. Results obtained showed that there no single probability distribution function is the best fit for all the 8 rainfall zones (table XVI).

Log-Pearson 3 (LP3) probability distribution function has been recommended for design hydro-meteorological events mostly flood and drought in South Africa (Alexander, 1990, 2001). From the results of this study, Log-Pearson 3 may not be the only best fit model for frequency analyses of extreme hydro-meteorological events in South Africa. It is therefore important to carry out model identification processes to identify best fit model for the specific required frequency analysis.

Probability-Probability (P-P) plots were applied to evaluate the performance of CMIC and LSSMIC. The plots showed that CMIC and LSSMIC performed fairly well. Although the Probability-Probability (P-P) plot results cannot be considered completely conclusive, CMIC and LSSMIC criteria make useful tools as model selection method for frequency analysis of extreme mean annual rainfall events.

#### **ACKNOWLEDGEMENT**

The study has been supported by the Provincial Dept. of Agriculture, Rural Development, Land and Environmental Affairs: Mpumalanga Provincial Government, South Africa.


#### **REFERENCES**

- [1]. Akaike, H., 1974. "A new look at the statistical model identification." IEEE Transaction on automatic control vol. 6 pp 716-725.
- [2]. Alexander, W.J.R., 1990. Flood Hydrology for Southern Africa. SANCOLD, Pretoria, RSA.
- [3]. Alexander, W.J.R., 2001. Flood Risk Reduction Measures. University of Pretoria, Pretoria, RSA.
- [4]. Alexander, W.J.R., 2002a. The standard design flood. Journal of the South Africa Institution of Civil Engineers, 44 (1):26-31.
- [6]. Anderson, T.W., Darling, D.A., 1952. Asymptotic theory of certain goodness-of-fit criteria based on stochastic processes. Ann.Mat.Stat. 23, 193-212.
- [8]. Anderson, D., R., and Burnham, K., P., 2002: Avoiding pitfalls when using information-theoretic methods: Journal of wildlife management 66(3): 912-918.
- [9]. Beven, K., J., 2000 Rain-Run-off modeling: The Primer. John Wiley and sons. Chichester, UK, 360, 360pp
- [10]. Bobee, B., and Rasmussen, P., F., 1995 Recent advances in flood frequency analysis. : Reviews of Geophysics, supplement, July 1111-1116.
- [11]. Bodini, A., and Cossu, Q., A., 2010 Vulnerability assessment of Central-East Sardinia ( Italy) to extreme rainfall events. Journal of Natural hazards and Earth systems sciences. 10. Pp 61-77
- [12]. Claeskens, G., Hjort, N.L., 2003. The focused Information Criterion: Journal of the American statistical Association. 98, 900-916.
- [13]. Association.
- [14]. Feyen, H.M.J., 1970 . Identification of run-off processes in catchments with a small scale topograph.
- [15]. Furrer, E., M., and Katz, R., W., 2008: "Improving the simulation of extreme precipitation events by stochastic weather generators". Water Resources Research 44, W 12439doi. 1029/2008 WR 007316, 2008.
- [16]. Gericke, O., J., 2010 Evaluation of the SDF method using a customized Design Flood Estimation Tool. University of Stellenbosch, Stellenbosch, South Africa 480 pp.

- [17]. Gorgens, A., H., M., Joint Peak- Volume ( JPV) Design Flood Hydrographs for South Africa. WRC Report 1420/3/07 Water Research Commission, Pretoria, South Africa.
- [18]. Gorgens, A., H., M., Lysons, S., Hayes, L., Makhabana, M., and Maluleke, D., 2007 Modernised South African Design Flood Practice in the context of Dam safety, WRC Report 1420 / 2 / 07, Water Research Commission, Pretoria, South Africa.
- [19]. Goswami, P., and Ramesh, K., V., 2007. Extreme rainfall events: Vulnerability Analysis for Disaster Management and Observation Systems Design. Research Report CSIR PP21.
- [20]. Hernandez, A., R., P., Balling R., C., Jr. and Barber-Matinez 2009. Comparative analysis of indices of extreme rainfall events: Variation and trend from Southern Mexico. *Journal de Atmosfera* 2 pages 219-228
- [21]. Hosking, J.R.M., 1990. L-moments: Analysis and estimation of distribution using Linear combinations of order statistics: *Journal of the Royal statistics society Series B.* 52, 105-124.
- [22]. Hosking, J.R.M., Wallis, J.R., Wood, E.F. 1985. Estimation of the generalized extreme-value distribution by the method of probability-weighted moments, *Technometrics.* 27 (3) pp, 251-261.
- [23]. Hjort, N.L., Claeskens, G., 2003. Rejoinder to the focused.
- [24]. Jiang, J., 2014. The fence method: *Advances in statistics.* Volume 2014 Article ID, 38081.
- [25]. Kidson, R., Richards, K.S., Carling, P.A., 2005. Reconstructing the Ca-100 year flood in Northern Thailand. *Geomorphology* 70 (2-4), 279-595
- [26]. Kottegoda, N.T., Rosso, R., 1998. *Statistics Probability and Reliability for Civil and Environmental Engineers.* McGrawHill, New York.
- [27]. Laio, et.al., 2009. Model selection techniques for the frequency analysis of hydrological extremes water Research. Vol.45, W07416.
- [28]. Laio, F., 2004. Cramer-Von Mises and Anderson-Darling goodness-of-fit tests for extreme value distributions with unknown parameters *Water Resources Research.* 40, W09308, doi:10.1029/2004WR003204
- [29]. Mathwave(2011), <http://www.mathwave.com>.
- [30]. Mallows, C.L., 1995. Some comments on Cp: *Technometrics.* 37, 362-372.
- [31]. Mallows, C.L., 1973. Some comments on Cp: *Technometrics.* 15, 661-675.
- [32]. Meiz, R., and Bloschl, G., 2004 Regionalisation of catchment model parameters. *J. Hydrol.* 287 pp 95-123.
- [33]. Mkhundi, S.H., Kachroo, R.K., Gunasekara, T.A.G., 2000. Flood frequency analysis of Southern Africa: II. Identification of regional distributions. *Hydrological Sciences Journal*, 45(3):449-464.
- [34]. Mutua, F.M., 1994. The use of the Akaike Information Criterion in the identification of an optimum flood frequency model. *Hydro. Sci.J.*39 (3), 235-244.
- [35]. Salami, A., W., ( 2004) Prediction of the annual flow regime along Asa River using probability distribution models. *AMSE periodicals, Lyon, France. Modeling c-2004* 65 (2), 41-56. (<http://amse-modeling.org/content.amse> 2004. htm)
- [36]. Schwarz, G., 1978. Estimating the dimension of a model. *Annals stat.* 6, 461-464.
- [37]. Schulze, R.E., 1989, Non-stationary catchment responses and other problems in determining flood series: A case for a simulation modeling approach: In: Kienzle, S., W., Maaren, H., (Eds); *Proceedings of the Fourth South African National Hydrological Symposium SANCIAHS, Pretoria, RSA* pp 135-157.
- [38]. Shamir, E., 2005 2004., Application of temporal streamflow descriptors in hydrologic model parameter estimation. *Water Resource Research* 41 doi: 10 : 1029/2004 WR 003409 SSN 0043-1397
- [39]. Shao, J., Sitter, R.R., 1996. Bootstrap for imprinted Survey data. *Journal of the American statistical Association*, 93, 819-831.
- [40]. Smithers, J.C., Schulze, R.E., 2001. Design runoff estimation: A review with reference to practices in South Africa, *Proceedings of Tenth South Africa National Hydrology Symposium: 26-28 September, 2001.* School of BEEH, University of Natal, Pietermaritzburg, RSA.
- [41]. Smithers, J.C., Schulze, R.E., 2003. Design rainfall and flood estimation in South Africa. WRC Report No. 1060/01/03, Water Research Commission, Pretoria, RSA.
- [42]. Stedinger, J.R., Vogel, R.M., Foufoula, E., 1993. Frequency analysis of extreme events, in *Handbook of Hydrology*, D.R., McGrawHill, chap. 18, 66pp.

- [57]. Stedinger, J.R., 1980. Fitting log normal distribution to hydrologic data. Water Resource research. 16(3)  
 [58]. pp, 481-490.  
 [59]. Stephens, M.A., 1976. Asymptotic results for goodness-of-fit statistics with unknown parameters. Ann. Stat. Vol. 4, 357-369.  
 [60]. Van der Linde, A., 2005. DIC in variable selection statistical Neerlandica. 59, 45-56.  
 [61]. Van der Linde, A., 2004. DIC in variable selection Technical report, Institute of statistics, University of Bremen, [http://www.math.uni-bremen.de/\\$\simsard1/download/papers\varse12.pdf](http://www.math.uni-bremen.de/$\simsard1/download/papers\varse12.pdf).  
 [62]. Wellner J.A., 1977. Aglireenko-Cantelli. Theorem and strong laws of large numbers for function of order statistics: The annual of statistics vol.5 number 3. 1977, 473-480.  
 [63]. Wilks, D.,S., 1998 Multi-site generalization of daily stochastic precipitation model, J. Hydro 210 178-191.  
 [64]. Willens, P., Olsson, J., Ambjerg\_Nielsen, Beecham,S., Pathirana, A., BulowGregersen, Madsen,H. and Nguyen, V.,T.,V. 2007 Impact of climate change on rainfall extreme and urban drainage systems pp19-20.  
 [65]. WMO- World Meteorological organization. 1988. Analysing long Time Series of Hydrological data with respect of climat variability WCAP-No. 3 WMO-TD No. 224.  
 [66]. WMO- World Meteorological organization. 2009 Guidelines on Analysis of extremes in a changing climate in support of informed decisions for adaptations. WCDMP-No. 72 WMO-TD No. 1500.  
 [67]. Yua-Ping, Xu, Booj, Martin, J., Tong, Yang\_Bin 2010 Uncertainty analysis in statistical modeling of extreme hydrological events  
 [68]. Yue, S., and Wang, 2004. The Mann-Kendall test modified by effective sample size to detect trend in serially correlated hydrological series.: Journal of Water Resources Management 18 Pages 201-218.

**Appendix A: Probability-Probability (P-P) plots for extreme low mean rainfall events for the 8 rainfall zones**

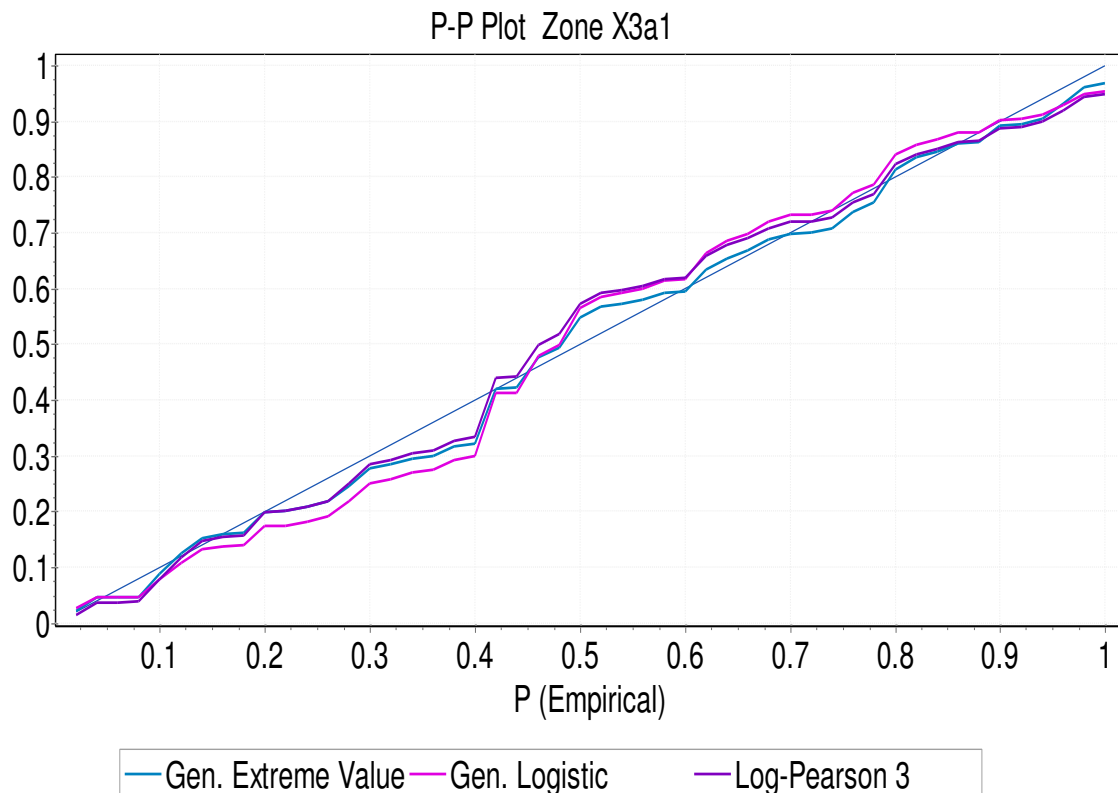

**Fig. 1: P-P plot Zone x3a1 : Extreme mean annual rainfall events**

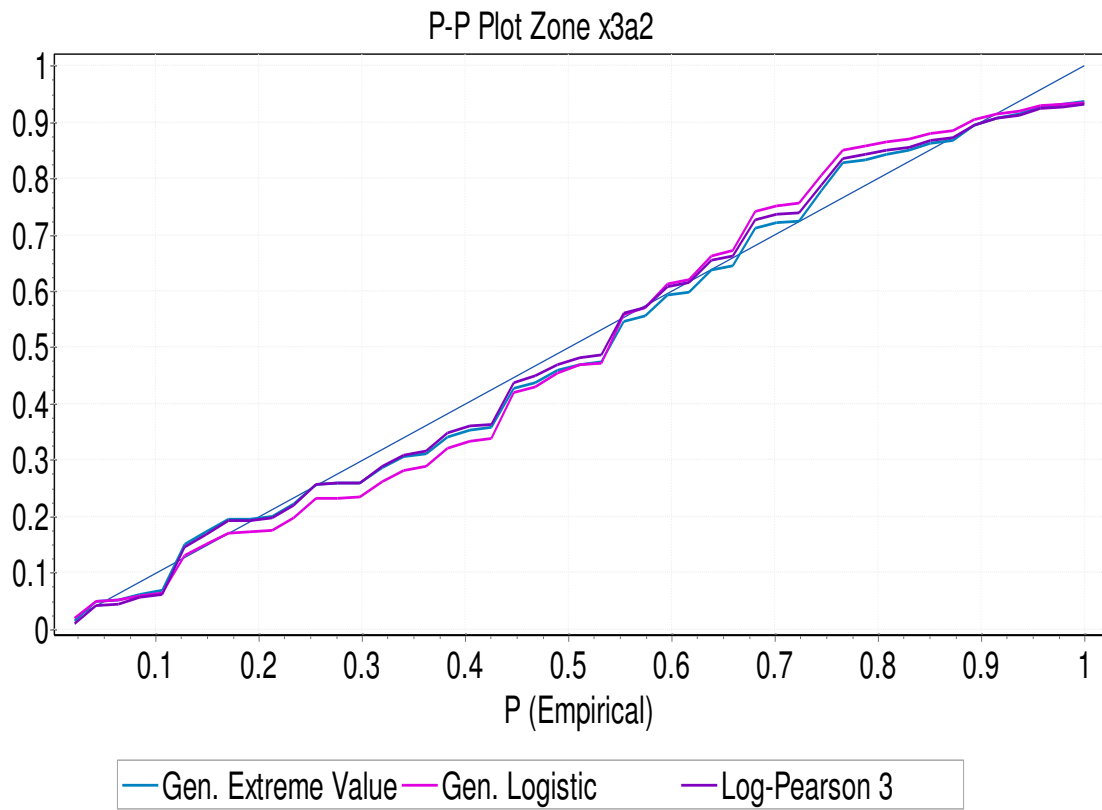


Fig. 2: P-P plot Zone x3a2 : Extreme mean annual rainfall events

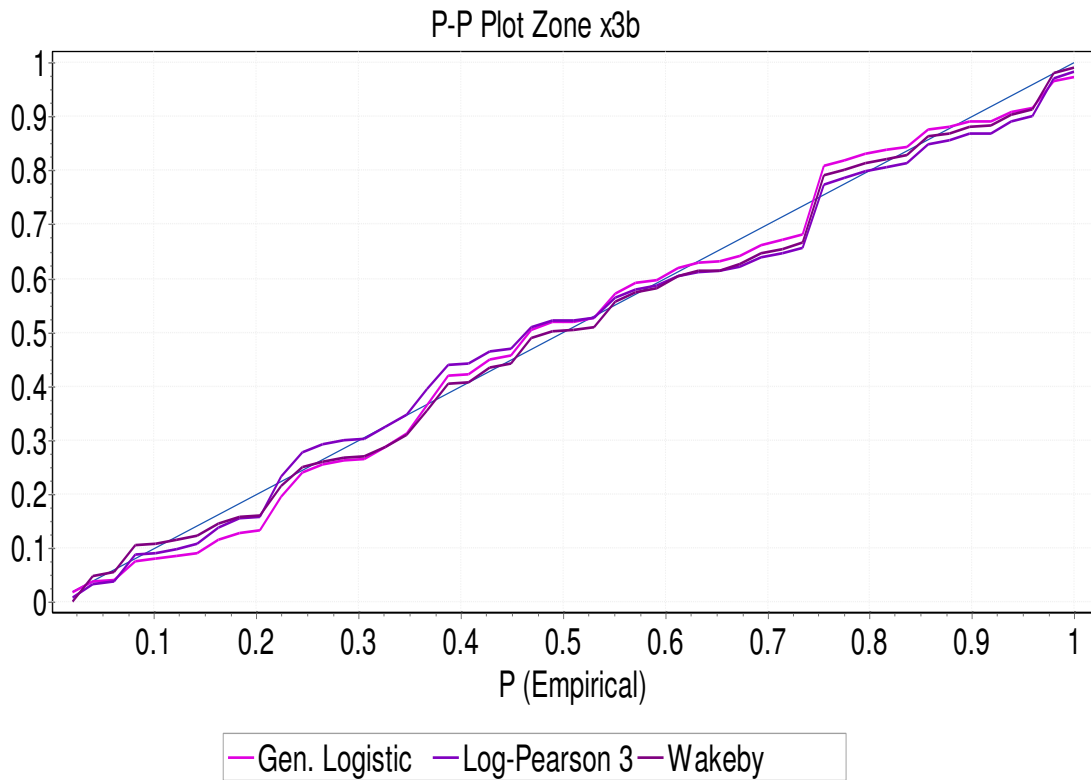


Fig. 3: P-P plot Zone x3b : Extreme mean annual rainfall events

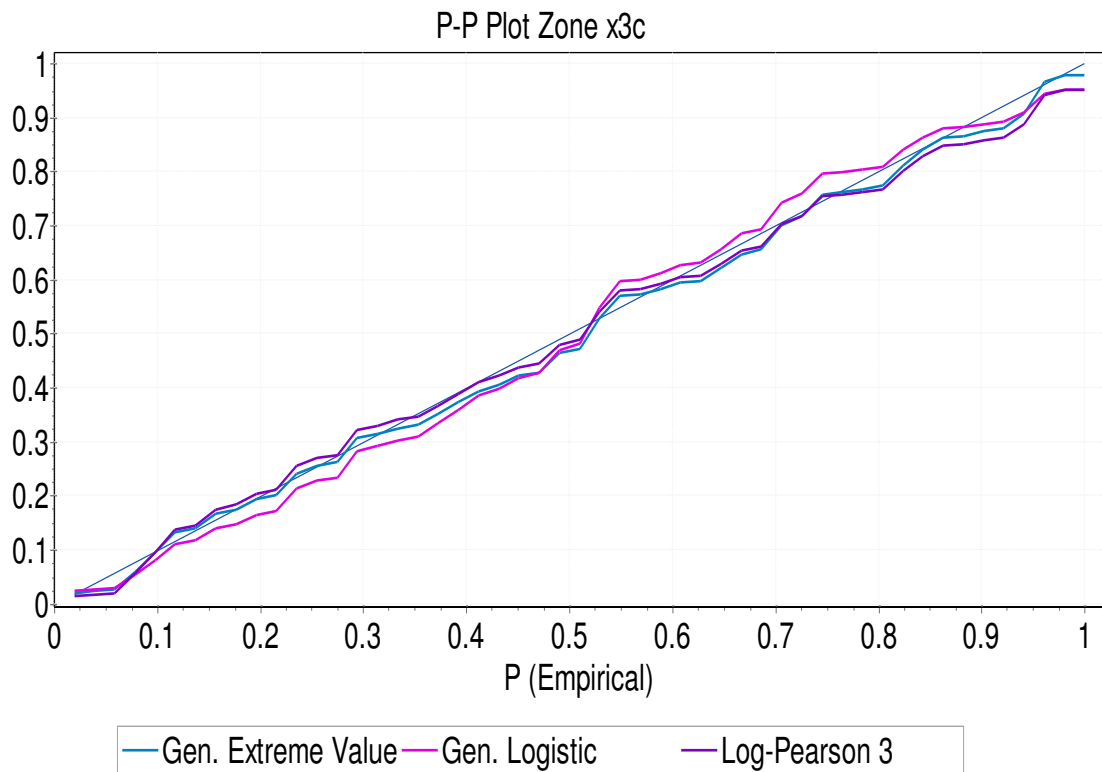


Fig.4: P-P plot Zone x3c : Extreme mean annual rainfall events

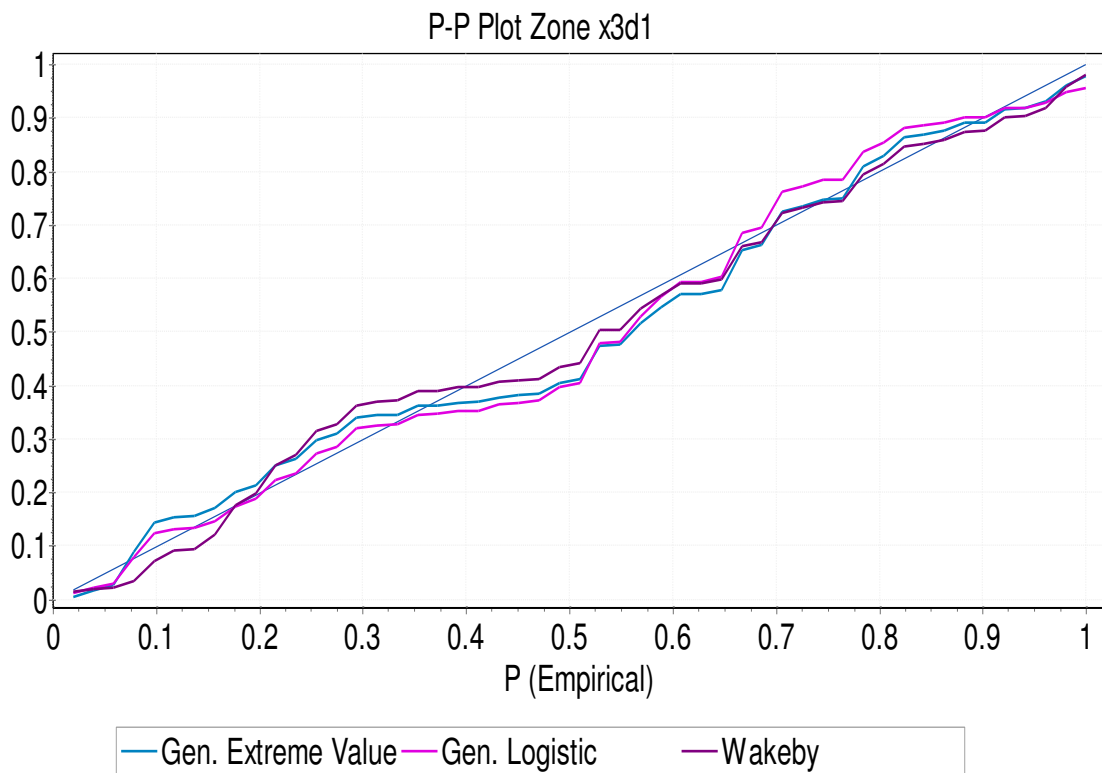


Fig. 5 P-P plot Zone x3d1: Extreme mean annual rainfall events

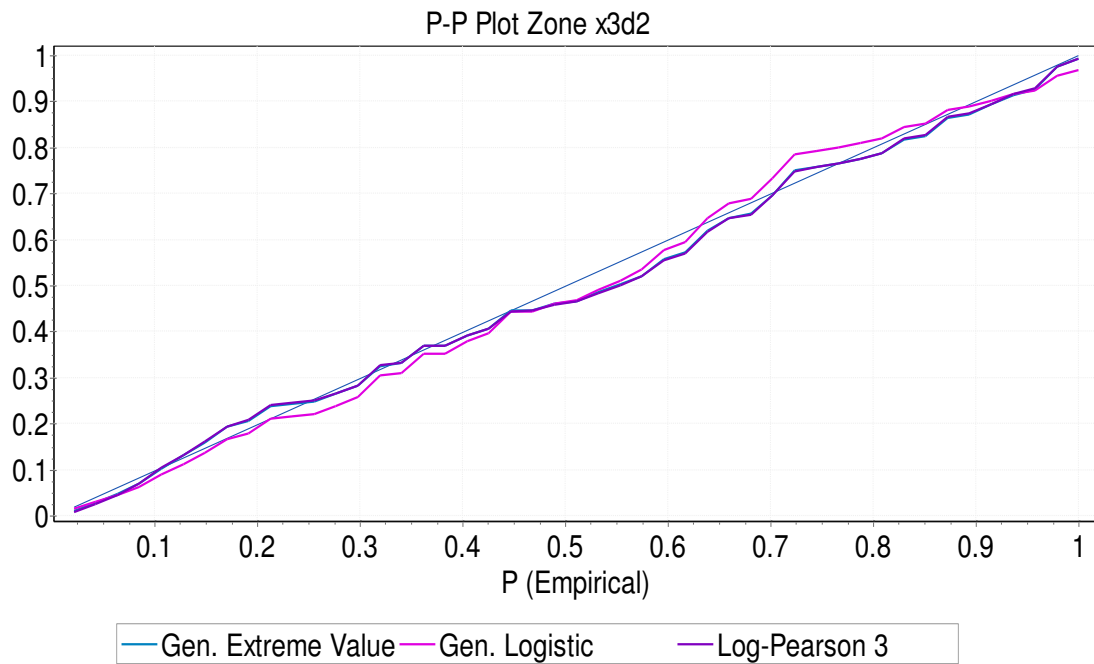


FIG. 6: P-P plot Zone x3d2 : Extreme mean annual rainfall events

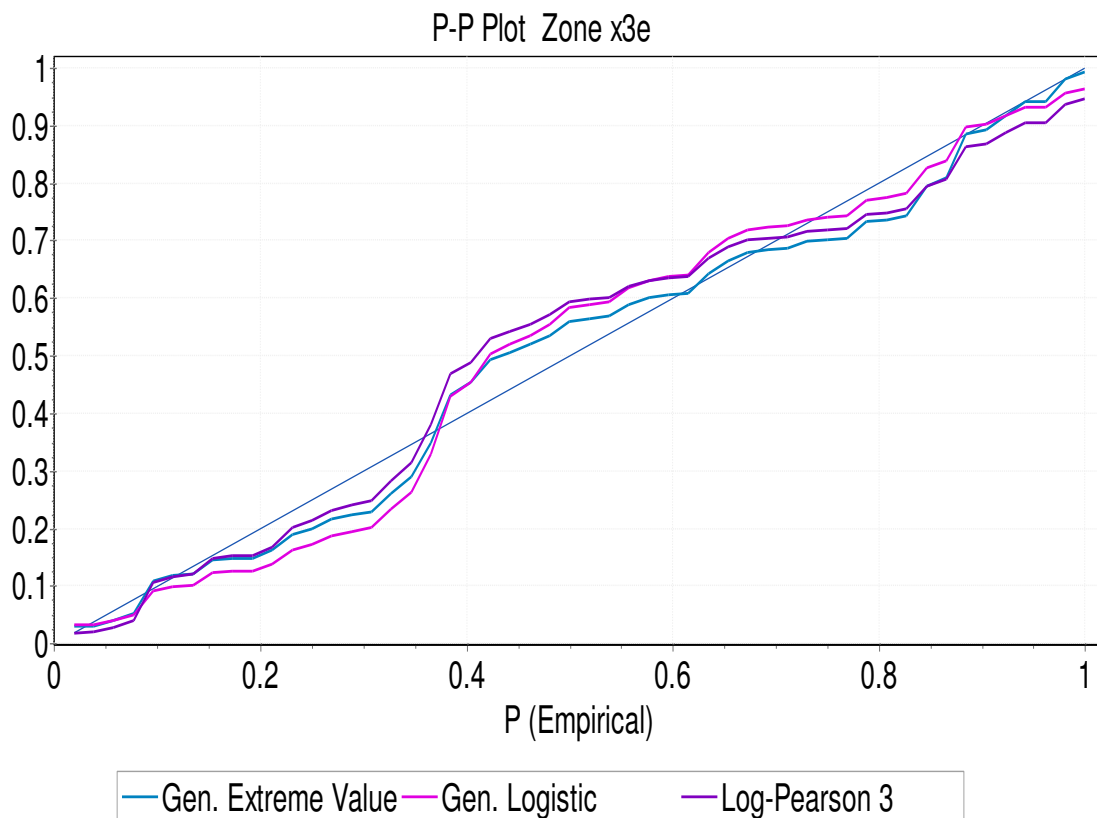


Fig. 7: P-P plot Zone x3e: Extreme mean annual rainfall events

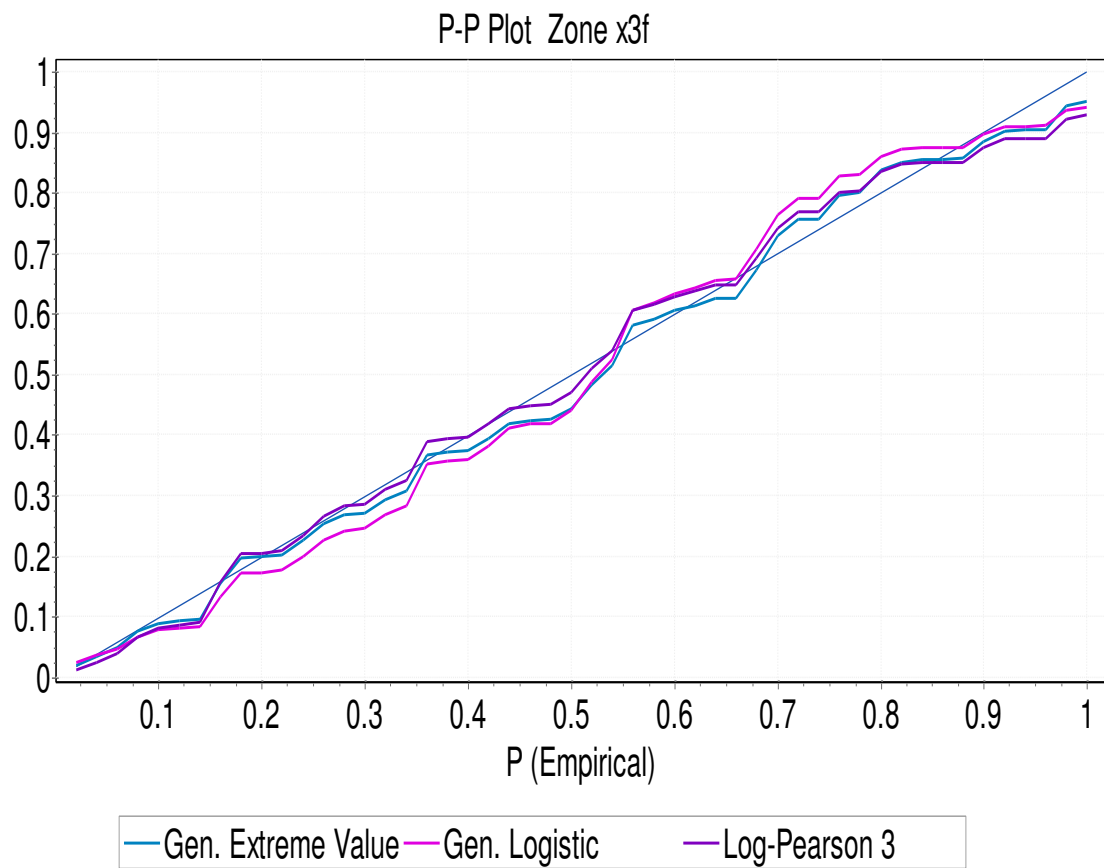


Fig.8: P-P plot Zone x3f : Extreme mean annual rainfall events